


Via castellazzo 9 - 20040 Cambiago (MI)
Tel +39 02 95651611 Fax +39 02 95651639
www.bremas.eu info@bremas.it

ISO 9001 Certified Quality System

Cod. CA0160007PL2

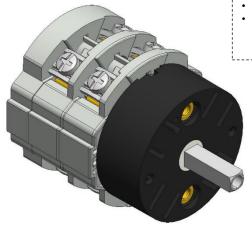

(Image is purely indicative)



Standard and Approvals

- · Switch according to IEC/EN 60947-3
- Certified UL60947-4-1A and CAN/CSA C22.2 No. 60947-4-1-07
- Suitable as Manual Motor Controller




Technical characteristics: Body

- Change-over switch 3 pole
- IP00 Protection degree
- Rated operational current le: 16A (AC-21A)
- Rated thermal current Ith: 20A
- Rated insulation voltage Ui: 690V
- Rear mounting
- Fixing with 2 screw at 28mm vertical
- Switching angle: 60°
- Class V2 self-extinguishing thermoplastic housing
- Assembled with metal shaft and threaded stud bolts to ensure maximum operating reliability
- Positive opening double break contacts, silver alloy made.


Technical characteristics: Knob

- Transparent plate 75,5x75,5mm and black knob
- Fixing with 2 screws at 28mm vertical
- IP 40 Protection degree


Positions



Electrical diagram



Electrical function

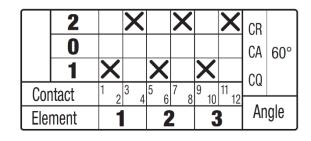



Via castellazzo 9 - 20040 Cambiago (MI) Tel +39 02 95651611 Fax +39 02 95651639 info@bremas.it www.bremas.eu


ISO 9001 Certified Quality System

Cod. CA0160007PL2

measures in mm (in)

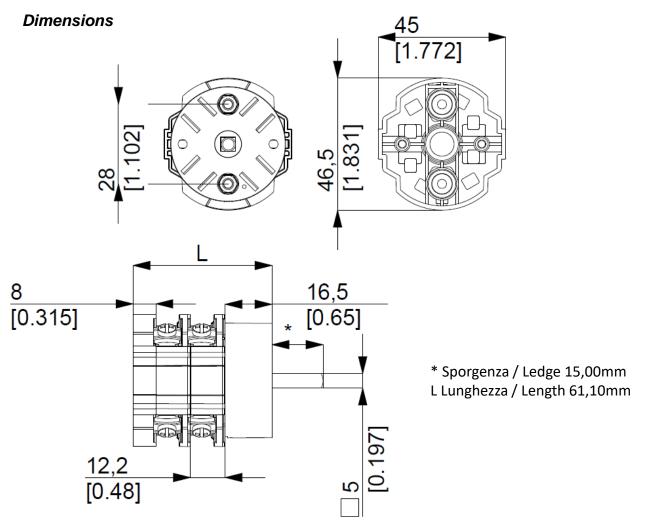

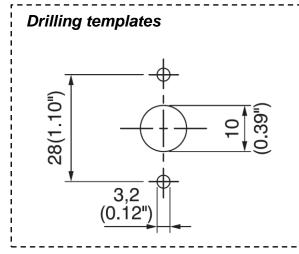

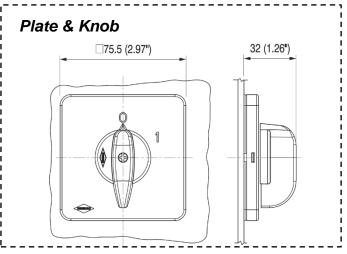



Bremas Ersce SpA

Via castellazzo 9 - 20040 Cambiago (MI) Tel +39 02 95651611 Fax +39 02 95651639 www.bremas.eu info@bremas.it

ISO 9001 Certified Quality System

Cod. CA0160007PL2

	Ui Ue Uimp Ith	V V kV A	690 690
	Ue Uimp Ith	V kV	690 6
	Uimp Ith	kV	6
	lth		
		A	
			20
	Ithe	A	20
		Hz W	50/60
		VV	0,5
			16
			16
	le	A	16
			-
AC-23A Switching of motor loads or other highly inductive loads 3 phase - 3 pole	-		4 (14)
			7,5 (14)
	-		-
			-
AC-23A Switching of motor loads or other highly inductive loads 1 phase - 2 pole			1,1 (12)
			2,2 (14)
AC-3 Squirrel cage motors: starting, swtiching off motors during running 3 phase - 3 pole			3,7 (12)
			5,5 (10)
	-		-
			0.75 (0)
AC-3 Squirrel cage motors: starting, swtiching off motors during running 1 phase - 2 pole			0,75 (9)
			1,5 (8)
			-
AC-4 Squirrel cage motors: starting, pluggign, inching			-
AC-15 Control of a.c electromagnetic loads			-
			6
			4
Rated breaking capability in AC-23A (cos ϕ =0,45)			112
	4000	A	112
	leur		240
			240
			4
			20
	3004	A	20
	Ho	III /CSA V	600/-
	ie		16
			5000
		A	25 (30)
	1001		4 (4.6)
			1 (16)
			2 (12)
3 phase - 3 pole			2 (7,8)
			3 (9,6)
			7,5 (11)
	600V	нр (А)	7,5 (9)
	Max		4
	-		120
		Cycles/nr	120
With flovible wires	\$4in \$4nu	mm²	2v1 F 4
WILLI HEXIDIE WIFES			2x1,5-4
Mish colidi			16-10
with solid wires	Min-Max		2x1,5-6
			M3,5
		NM	1
		ID	00
		IP.	00
		۰٫	
		°C	-25 ÷ +55
		°C	-25 ÷ +55 -30 ÷ +70 2-78
	With flexible wires With solid wires	Min-Max	Ie