


**Cod. CA0500004PL3**



(Image is purely indicative)

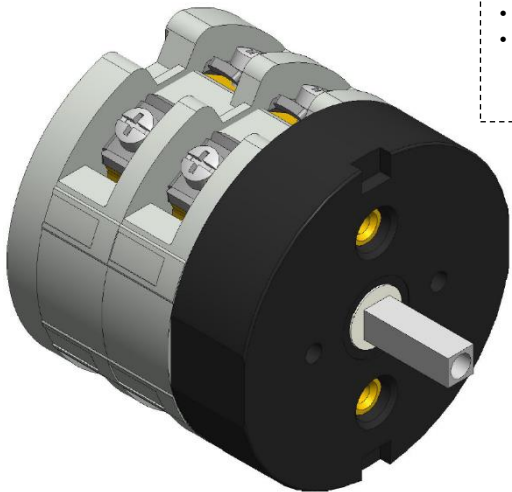

### Standard and Approvals

- Switch according to IEC/EN 60947-3
- Certified UL60947-4-1A and CAN/CSA C22.2 No. 60947-4-1-07
- Suitable as Manual Motor Controller




### Technical characteristics: Body

- ON-OFF switch 4 pole
- IP00 Protection degree
- Rated operational current Ie: 50A (AC-21A)
- Rated thermal current Ith: 63A
- Rated insulation voltage Ui: 690V
- Rear mounting
- Fixing with 2 screw at 40mm vertical
- Switching angle: 60°
- Class V2 self-extinguishing thermoplastic housing
- Assembled with metal shaft and threaded stud bolts to ensure maximum operating reliability
- Positive opening double break contacts, silver alloy made.


### Technical characteristics: Knob

- Transparent plate 105x105mm and black knob
- Fixing with 2 screws at 40mm vertical
- IP 40 Protection degree

### Positions

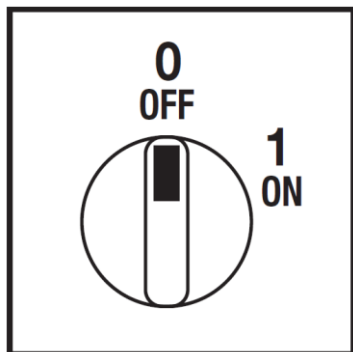

### Electrical diagram

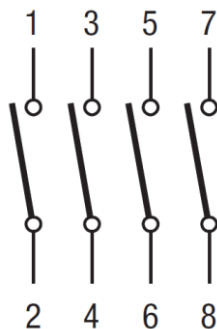


### Electrical function

|         |          |          |          |     |     |       |     |
|---------|----------|----------|----------|-----|-----|-------|-----|
|         | <b>0</b> |          |          |     |     | CR    | 60° |
|         | <b>1</b> | X        | X        | X   | X   | CA    |     |
| Contact |          | 1 2      | 3 4      | 5 6 | 7 8 | CQ    |     |
| Element |          | <b>1</b> | <b>2</b> |     |     | Angle |     |


**Cod. CA0500004PL3**

measures in mm (in)


**Dimensions**

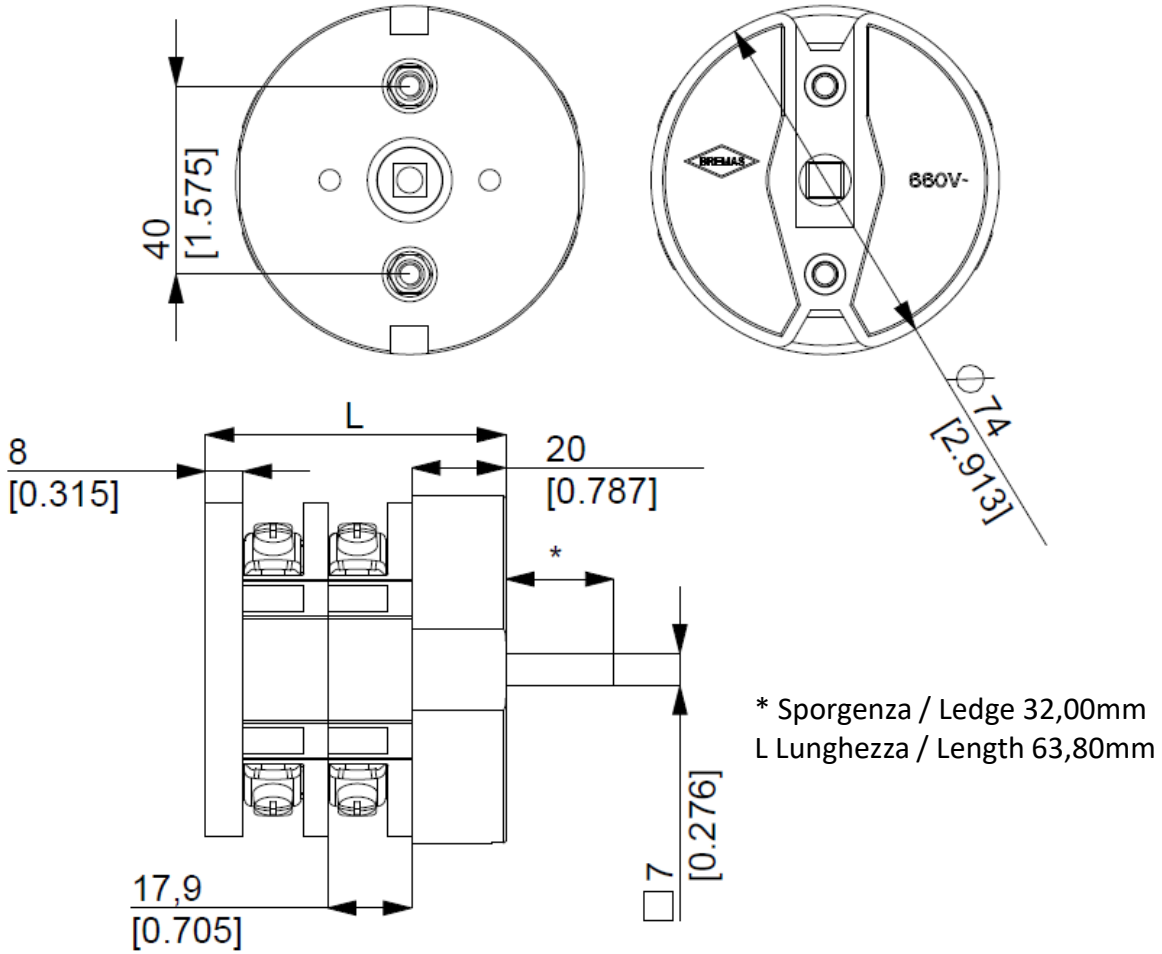

**Drilling templates**

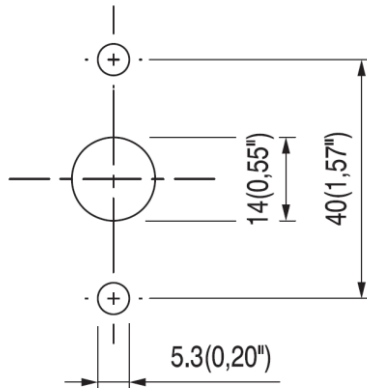

**Plate & Knob**

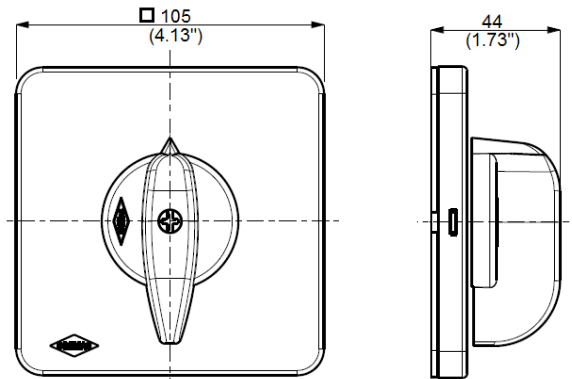

### Cod. CA0500004PL3

| Technical data IEC 947-3 EN 60947-3   |                     |                          |                 |          |
|---|---------------------|--------------------------|-----------------|----------|
| Rated insulation voltage  | Ui                  | V                        | 690             |          |
| Rated operating voltage   | Ue                  | V                        | 690             |          |
| Rated impulse withstand voltage   | Uimp                | kV                       | 6               |          |
| Rated thermal current for open switch   | Ith                 | A                        | 63              |          |
| Rated thermal current for enclosed switch   | Ithe                | A                        | 63              |          |
| Rated operation frequency   |                     | Hz                       | 50/60           |          |
| Power dissipation for each pole   |                     | W                        | 1,5             |          |
| Rated operating current   |                     |                          |                 |          |
| AC-21A Switching resistive loads, including moderate overloads                            | Ie                  | A                        | 50              |          |
| AC-22A Switching of mixed resistive and inductive loads, including moderate overloads     | Ie                  | A                        | 40              |          |
| AC-20A Connecting and disconnecting under no loads conditions                             |                     |                          | -               |          |
| Rated operating power   |                     |                          |                 |          |
| AC-23A Switching of motor loads or other highly inductive loads 3 phase - 3 pole          | 230V                | Kw (A)                   | 11 (35)         |          |
|   | 400V                | Kw (A)                   | 22 (40)         |          |
|   | 500V                | Kw (A)                   | 22 (32)         |          |
|   | 690V                | Kw (A)                   | 20 (20)         |          |
| AC-23A Switching of motor loads or other highly inductive loads 1 phase - 2 pole          | 110V                | Kw (A)                   | 3 (36)          |          |
|   | 230V                | Kw (A)                   | 6,5 (36)        |          |
| AC-3 Squirrel cage motors: starting, switching off motors during running 3 phase - 3 pole | 230V                | Kw (A)                   | 10 (35)         |          |
|   | 400V                | Kw (A)                   | 17,5 (32)       |          |
|   | 500V                | Kw (A)                   | 17,5 (27)       |          |
|   | 690V                | Kw (A)                   | 18,5 (21)       |          |
| AC-3 Squirrel cage motors: starting, switching off motors during running 1 phase - 2 pole | 110V                | Kw (A)                   | 2,6 (32)        |          |
|   | 230V                | Kw (A)                   | 5,5 (30)        |          |
|   | 400V                | Kw (A)                   | -               |          |
| AC-4 Squirrel cage motors: starting, pluggign, inching                                    | 230V                | Kw (A)                   | 3,2 (11)        |          |
|   | 400V                | Kw (A)                   | 6 (11)          |          |
| AC-15 Control of a.c electromagnetic loads  | 230V                | A                        | -               |          |
|   | 400V                | A                        | -               |          |
| Rated breaking capability in AC-23A (cos φ=0,45)  | 230V                | A                        | 330             |          |
|   | 400V                | A                        | 330             |          |
| Short circuit protection  |                     |                          |                 |          |
| Rated short time withstand current  | Icw                 | A                        | 500             |          |
| Rated short-circuit make capacity   | Icm                 | A                        | 2000            |          |
| Rated conditional short-circuit current   | -                   | kA                       | 10              |          |
| With fuses class gG   | 500V                | A                        | 50              |          |
| Thecnical data UL/CSA   |                     |                          |                 |          |
| Rated operating voltage   | Ue                  | UL/CSA V                 | 600/-           |          |
| General use current   | Ie                  | UL/CSA A                 | 50/-            |          |
| Short circuit rating @600Vac  |                     | Arms                     | 5000            |          |
| Fuse size (Class RK5, 600Vac, 200kA A.I.C.)   |                     | A                        | 60              |          |
| Rated operating power   |                     |                          |                 |          |
| 1 phase - 2 pole  | 120V                | Hp (A)                   | 3 (34)/-        |          |
|   | 240V                | Hp (A)                   | 7,5 (40)/-      |          |
| 3 phase - 3 pole  | 200V                | Hp (A)                   | 10 (32,2)/-     |          |
|   | 240V                | Hp (A)                   | 15 (42)/-       |          |
|   | 480V                | Hp (A)                   | 20 (27)/-       |          |
|   | 600V                | Hp (A)                   | 25 (27)/-       |          |
| Mechanical characteristics  |                     |                          |                 |          |
| Panel tickness  | Max                 | mm                       | 4               |          |
| Mechanical life   |                     | Cycles x 10 <sup>6</sup> | 1,5             |          |
|   |                     | Cycles/hr                | 120             |          |
| Connection according to IEC 9471-1 and EN 50947-1   |                     |                          |                 |          |
| Connecting capability   | With flexible wires | Min-Max                  | mm <sup>2</sup> | 2x2,5-10 |
|   |                     | Min-Max                  | AWG             | 14-8     |
| Connection terminal screw dimensions  | With solid wires    | Min-Max                  | mm <sup>2</sup> | 2x2,5-16 |
|   |                     |                          | Type            | M4       |
| Screw tightening torque   |                     | Nm                       | 1,7             |          |
| Protection degree IEC 529 EN 60529  |                     |                          |                 |          |
| Terminals   |                     | IP                       | 00              |          |
| Ambient conditions  |                     |                          |                 |          |
| Operating ambient temperature   |                     | °C                       | -25 ÷ +55       |          |
| Storage ambient temprature  |                     | °C                       | -30 ÷ +70       |          |
| Withstand to constant humid according to IEC 60068  |                     |                          | 2-78            |          |
| Withstand to cyclic humid according to IEC 60068  |                     |                          | 2-30            |          |