


**Cod. CA06300G43L3**



(Image is purely indicative)

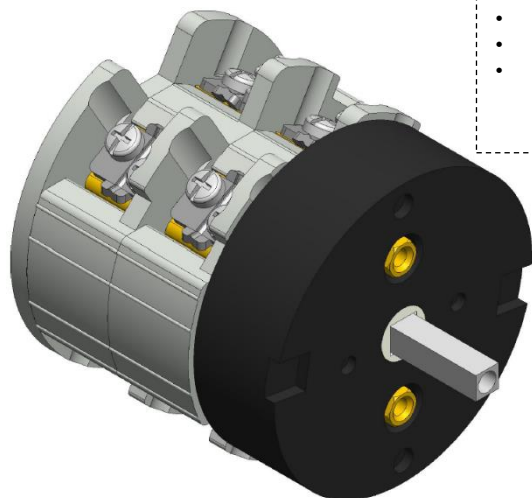

### Standard and Approvals

- Switch according to IEC/EN 60947-3
- Certified UL60947-4-1A and CAN/CSA C22.2 No. 60947-4-1-07
- Suitable as Manual Motor Controller




### Technical characteristics: Body

- ON-OFF switch 4 pole with padlockable handle
- IP00 Protection degree
- Rated operational current Ie: 75A (AC-21A)
- Rated thermal current Ith: 80A
- Rated insulation voltage Ui: 690V
- Rear mounting
- Fixing with 2 screw at 40mm vertical
- Switching angle: 90°
- Class V2 self-extinguishing thermoplastic housing
- Assembled with metal shaft and threaded stud bolts to ensure maximum operating reliability
- Positive opening double break contacts, silver alloy made.


### Technical characteristics: Knob

- Yellow plate 105x105mm and red padlockable knob (max 3 padlocks)

### Positions

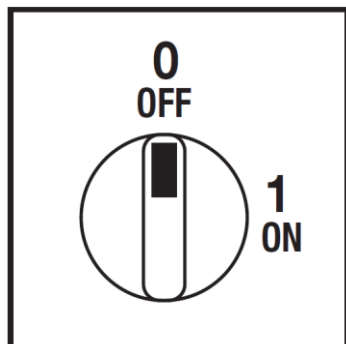

### Electrical diagram

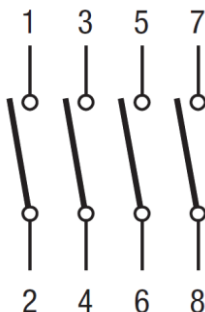


### Electrical Function

|         |          |          |          |          |          |       |     |
|---------|----------|----------|----------|----------|----------|-------|-----|
|         | <b>0</b> |          |          |          |          | CR    |     |
|         | <b>1</b> | <b>X</b> | <b>X</b> | <b>X</b> | <b>X</b> | CA    | 90° |
| Contact |          | 1        | 3        | 5        | 7        | CQ    |     |
| Element |          | <b>1</b> |          | <b>2</b> |          | Angle |     |


**Cod. CA06300G43L3**

measures in mm (in)

**Dimensions**

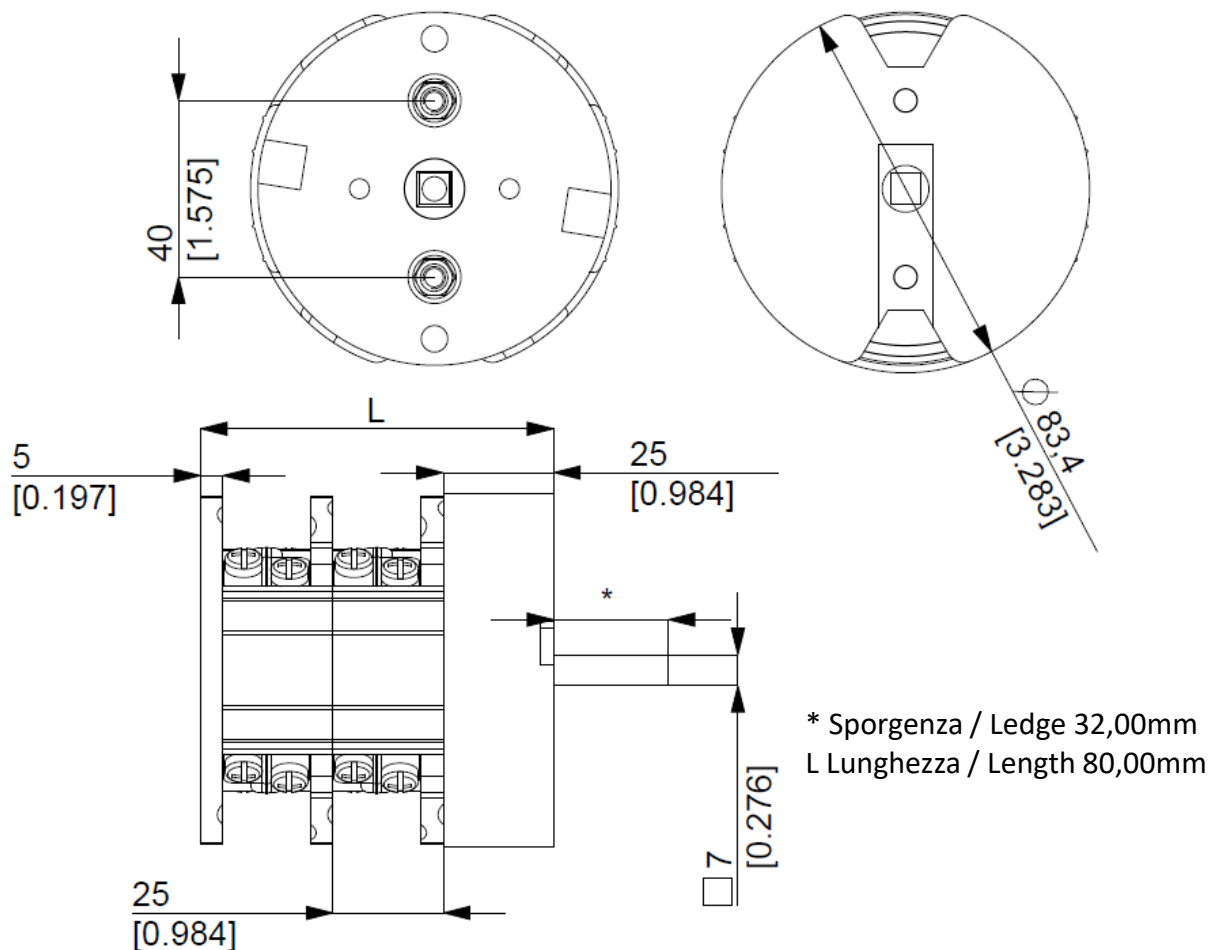

**Drilling templates**

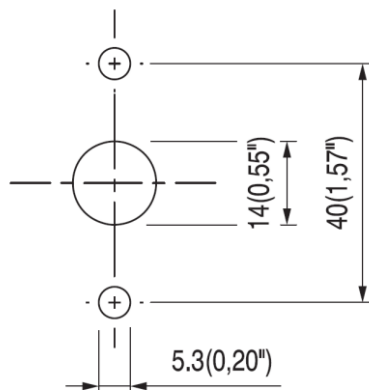

### Cod. CA06300G43L3

|   |                     |                          |                 |       |
|---|---------------------|--------------------------|-----------------|-------|
| <b>Technical data IEC 947-3 EN 60947-3</b>  |                     |                          |                 |       |
| Rated insulation voltage  | Ui                  | V                        | 690             |       |
| Rated operating voltage   | Ue                  | V                        | 690             |       |
| Rated impulse withstand voltage   | Uimp                | kV                       | 6               |       |
| Rated thermal current for open switch   | Ith                 | A                        | 80              |       |
| Rated thermal current for enclosed switch   | Ithe                | A                        | 80              |       |
| Rated operation frequency   |                     | Hz                       | 50/60           |       |
| Power dissipation for each pole   |                     | W                        | 2,5             |       |
| <b>Rated operating current</b>  |                     |                          |                 |       |
| AC-21A Switching resistive loads, including moderate overloads                            | Ie                  | A                        | 75              |       |
| AC-22A Switching of mixed resistive and inductive loads, including moderate overloads     | Ie                  | A                        | 63 <sup>1</sup> |       |
| AC-20A Connecting and disconnecting under no loads conditions                             |                     |                          | -               |       |
| <b>Rated operating power</b>  |                     |                          |                 |       |
| AC-23A Switching of motor loads or other highly inductive loads 3 phase - 3 pole          | 230V                | Kw (A)                   | 18,5 (58)       |       |
|   | 400V                | Kw (A)                   | 30 (54)         |       |
|   | 500V                | Kw (A)                   | 22 (32)         |       |
|   | 690V                | Kw (A)                   | -               |       |
| AC-23A Switching of motor loads or other highly inductive loads 1 phase - 2 pole          | 110V                | Kw (A)                   | 5,5 (63)        |       |
|   | 230V                | Kw (A)                   | 10 (32)         |       |
| AC-3 Squirrel cage motors: starting, switching off motors during running 3 phase - 3 pole | 230V                | Kw (A)                   | 15 (47)         |       |
|   | 400V                | Kw (A)                   | 22 (40)         |       |
|   | 500V                | Kw (A)                   | 22 (32)         |       |
|   | 690V                | Kw (A)                   | -               |       |
| AC-3 Squirrel cage motors: starting, switching off motors during running 1 phase - 2 pole | 110V                | Kw (A)                   | 4 (45)          |       |
|   | 230V                | Kw (A)                   | 7,5 (40)        |       |
|   | 400V                | Kw (A)                   | -               |       |
|   | 400V                | Kw (A)                   | 5,5 (17)        |       |
| AC-4 Squirrel cage motors: starting, pluggin, inching                                     | 400V                | Kw (A)                   | 7,5 (14)        |       |
|   | 230V                | A                        | -               |       |
| AC-15 Control of a.c electromagnetic loads  | 400V                | A                        | -               |       |
|   | 230V                | A                        | -               |       |
| Rated breaking capability in AC-23A (cos φ=0,45)  | 230V                | A                        | 464             |       |
|   | 400V                | A                        | 432             |       |
| <b>Short circuit protection</b>   |                     |                          |                 |       |
| Rated short time withstand current  | Icw                 | A                        | 800             |       |
| Rated short-circuit make capacity   | Icm                 | A                        | 2500            |       |
| Rated conditional short-circuit current   | -                   | kA                       | 15              |       |
| With fuses class gG   | 500V                | A                        | 63              |       |
| <b>Technical data UL/CSA</b>  |                     |                          |                 |       |
| Rated operating voltage   | Ue                  | UL/CSA V                 | 600/600         |       |
| General use current   | Ie                  | UL/CSA A                 | 85/63           |       |
| Short circuit rating @600Vac  |                     | Arms                     | -               |       |
| Fuse size (Class RK5, 600Vac, 200kA A.I.C.)   |                     | A                        | -               |       |
| <b>Rated operating power</b>  |                     |                          |                 |       |
| 1 phase - 2 pole  | 120V                | Hp (A)                   | 7,5 (80)/-      |       |
|   | 240V                | Hp (A)                   | 10 (50)/-       |       |
| 3 phase - 3 pole  | 200V                | Hp (A)                   | 20 (62,1)/-     |       |
|   | 240V                | Hp (A)                   | 20 (54)/-       |       |
|   | 480V                | Hp (A)                   | 30 (40)/-       |       |
|   | 600V                | Hp (A)                   | 40 (41)/50      |       |
| <b>Mechanical characteristics</b>   |                     |                          |                 |       |
| Mechanical life   |                     | Cycles x 10 <sup>6</sup> | 1               |       |
|   |                     | Cycles/hr                | 120             |       |
| <b>Connection according to IEC 9471-1 and EN 50947-1</b>                                  |                     |                          |                 |       |
| Connecting capability   | With flexible wires | Min-Max                  | mm <sup>2</sup> | 6-16  |
|   |                     | Min-Max                  | AWG             | 10-6  |
|   | With solid wires    | Min-Max                  | mm <sup>2</sup> | 10-25 |
| Connection terminal screw dimensions  |                     | Type                     | 2xM5            |       |
| Screw tightening torque   |                     | Nm                       | 2,8             |       |
| <b>Protection degree IEC 529 EN 60529</b>   |                     |                          |                 |       |
| Terminals   |                     | IP                       | 00              |       |
| <b>Ambient conditions</b>   |                     |                          |                 |       |
| Operating ambient temperature   |                     | °C                       | -25 ÷ +55       |       |
| Storage ambient temprature  |                     | °C                       | -30 ÷ +70       |       |
| Withstand to constant humid according to IEC 60068  |                     |                          | 2-78            |       |
| Withstand to cyclic humid according to IEC 60068  |                     |                          | 2-30            |       |

Notes:

<sup>1</sup> = at 500V