


Cod. CQ016DN08DDN

Standard and Approvals

- Switch according to IEC/EN 60947-3
- Certified UL60947-4-1A and CAN/CSA C22.2 No. 60947-4-1-07
- Suitable as Manual Motor Controller

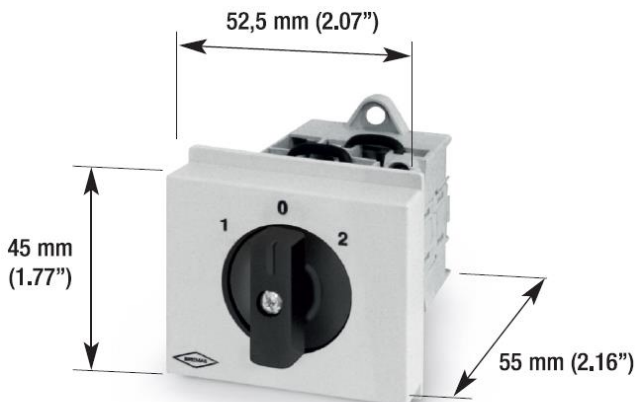

Technical characteristics: Body

- DDN solutions for panel/distribution board or DIN rail
- Change-over switch 2 pole
- IP20 Protection degree
- Rated operational current Ie: 20A (AC-21A)
- Rated thermal current Ith: 20A
- Rated insulation voltage Ui: 690V
- Panel Mounting
- Fixing with 2 screw at 48mm or DIN rail
- Switching angle: 45°
- Class V2 self-extinguishing thermoplastic housing
- Positive opening double break contacts, silver alloy made.





(Image is purely indicative)

Positions

Electrical diagram

Electrical function

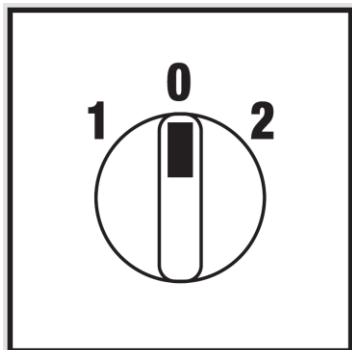


	2					×		×					45°	
	0													
	1					×		×						
Contact		1	2	3	4	5	6	7	8	9	10	11	12	Angle
Element			1				2				3			


Cod. CQ016DN08DDN

measures in mm (in)

Dimensions

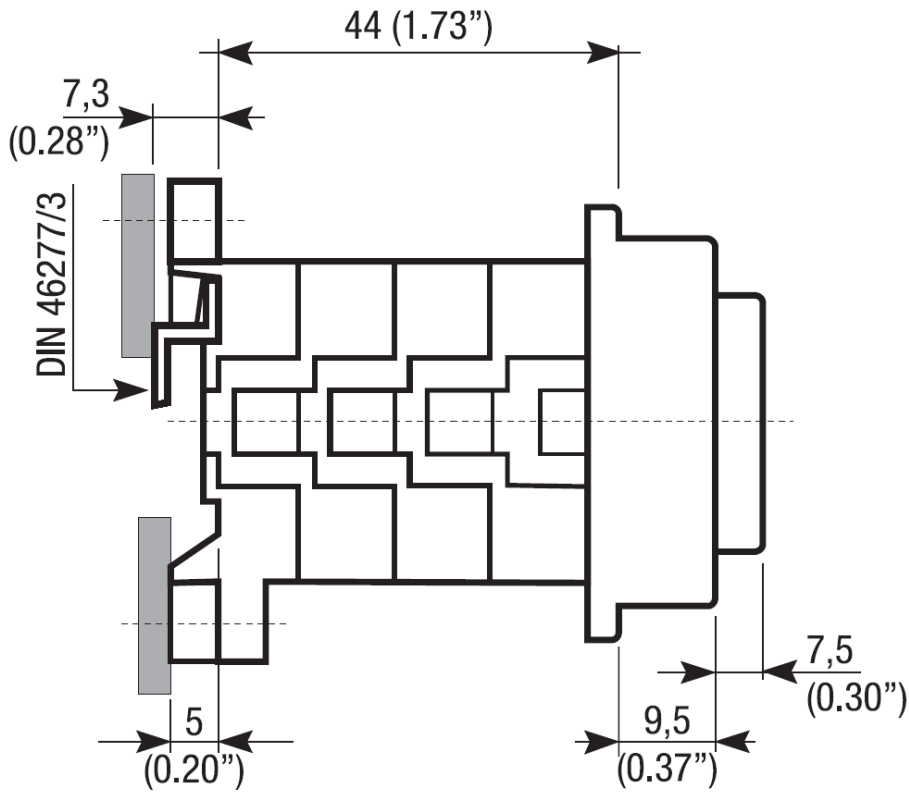

Drilling templates

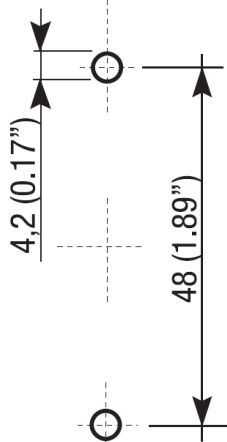

Cod. CQ016DN08DDN

			CQ016	
Technical data IEC 947-3 EN 60947-3				
Rated insulation voltage	Ui	V	690	
Rated operating voltage	Ue	V	690	
Rated impulse withstand voltage	Uimp	kV	6	
Rated thermal current for open switch	Ith	A	20	
Rated thermal current for enclosed switch	Ithe	A	20	
Rated operation frequency		Hz	50/60	
Power dissipation for each pole		W	0,6	
Rated operating current				
AC-21A Switching resistive loads, including moderate overloads	Ie	A	20	
AC-22A Switching of mixed resistive and inductive loads, including moderate overloads	Ie	A	16	
AC-20A Connecting and disconnecting under no loads conditions			-	
Rated operating power				
AC-23A Switching of motor loads or other highly inductive loads 3 phase - 3 pole	230V	Kw (A)	5,5 (17)	
	400V	Kw (A)	9 (16)	
	500V	Kw (A)	9 (13)	
	690V	Kw (A)	9 (9)	
AC-3 Squirrel cage motors: starting, switching off motors during running 3 phase - 3 pole	230V	Kw (A)	4 (13)	
	400V	Kw (A)	7,5 (14)	
	500V	Kw (A)	7,5 (11)	
	690V	Kw (A)	7,5 (8)	
AC-4 Squirrel cage motors: starting, pluggign, inching	230V	Kw (A)	1,5 (4)	
	400V	Kw (A)	2,2 (4)	
AC-15 Control of a.c electromagnetic loads	230V	A	6	
	400V	A	4	
Rated breaking capability in AC-23A (cos φ=0,45)	230V	A	128	
	400V	A	128	
Short circuit protection				
Rated short time withstand current	Icw	A	240	
Rated short-circuit make capacity	Icm	A	1000	
Rated conditional short-circuit current	-	kA	5	
With fuses class gG	500V	A	20	
Technical data UL/CSA				
Rated operating voltage	Ue	UL/CSA V	600	
General use current	Ie	UL/CSA A	20	
Short circuit rating @600Vac		Arms	5000	
Rated operating power				
1 phase - 2 pole	120V	UL/CSA Hp	1,5/0,5	
	240V	UL/CSA Hp	3/1,5	
3 phase - 3 pole	200V	UL/CSA Hp	5/3	
	240V	UL/CSA Hp	7,5/5	
	480V	UL/CSA Hp	7,5/7,5	
	600V	UL/CSA Hp	10/10	
Mechanical characteristics				
Mechanical life		Cycles x 10 ⁶	2	
		Cycles/hour	120	
Connection according to IEC 9471-1 and EN 50947-1				
Connecting capability	With flexible wires	Min-Max	mm2	2x1,5-2,5
		Min-Max	AWG	16-12
	With solid wires	Min-Max	mm2	2x1,5-4
Connection terminal screw dimensions		Type	M3,5	
Screw tightening torque		Nm	1	
Protection degree IEC 529 EN 60529				
Terminals		IP	20	
Ambient conditions				
Operating ambient temperature		°C	-25 ÷ +55	
Storage ambient temprature		°C	-30 ÷ +70	
Withstand to constant humid according to IEC 60068			2-78	
Withstand to cyclic humid according to IEC 60068			2-30	