

Cod. DS0323RRK6

Standard and Approvals

- Switch according to IEC/EN 60947-3
- Certified UL60947-4-1A and CAN/CSA C22.2 No. 60947-4-1-07
- Suitable as Manual Motor Controller



Technical characteristics: Body


- Disconnect switch 3P
- IP20 protection degree
- Rating operational current Ie: 32A (AC-21A)
- Rating thermal current Ith: 32A
- Rating insulation voltage: 690V
- Base Mounting
- Fixing with 2 screw at 28mm (1,10")
- Switching angle: 90°
- Positive opening double break contacts, silver alloy made.
- Self-extinguishing class V2




Technical characteristics: Plate and knob

- Grey plate 67x67mm and black padlockable knob (max. 3 padlocks)
- Protection degree IP66
- Fixing with 2 screw at 28mm (1,10")

Plate and position

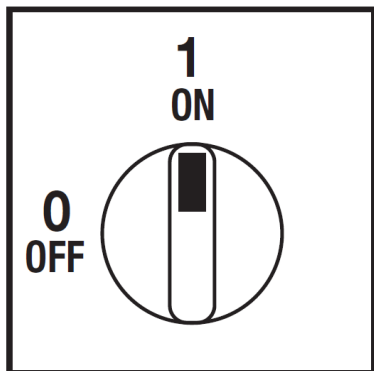



Electrical scheme

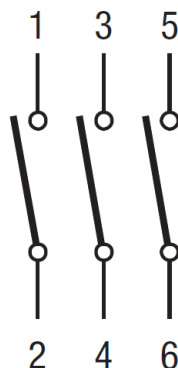

Cod. DS0323RRK6

measures in mm (in)

Dimensions

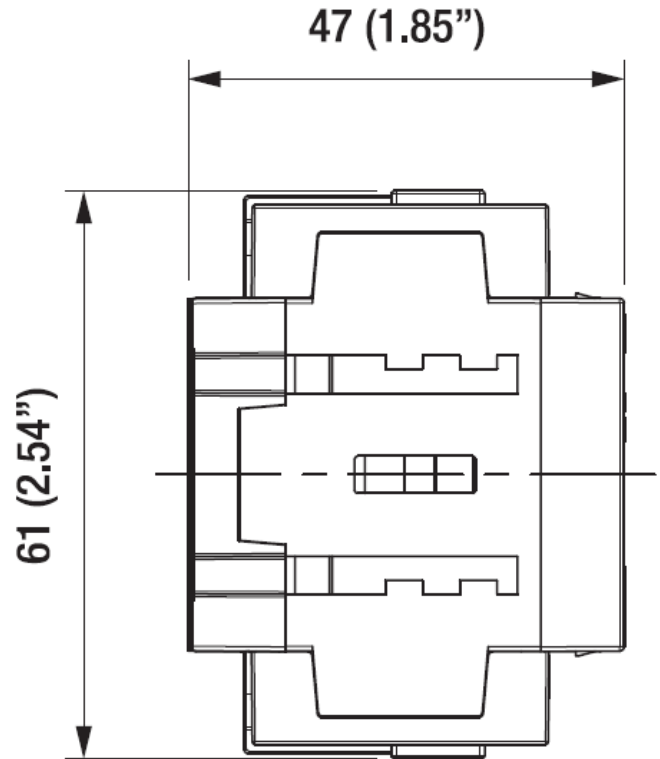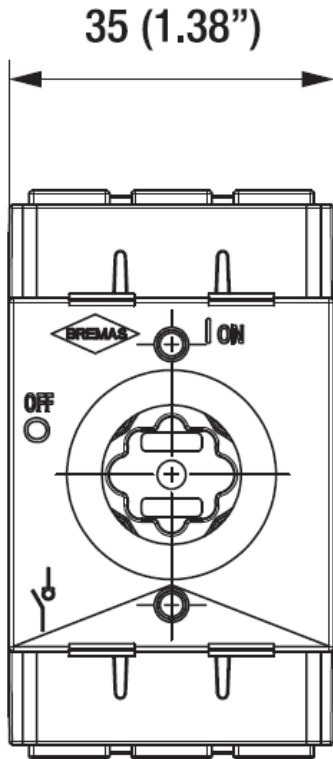

Drilling templates


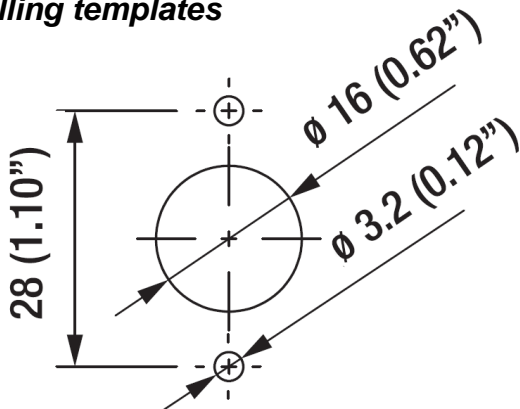


Plate & Knob

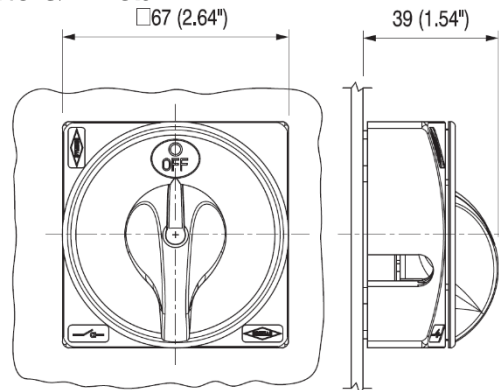

Cod. DS0323RRK6

| Technical data IEC 947-3 EN 60947-3 | | | | |
|--|--------|-----------------------------|-----------------|---------------------|
| Rated insulation voltage | | Ui | V | 800 |
| Rated operating voltage | | Ue | V | 800 |
| Rated impulse withstand voltage | | Uimp | kV | 8 |
| Rated thermal current for open switch | | Ith | A | 32 |
| Rated thermal current for enclosed switch | | Ithe | A | 32 |
| Rated operation frequency | | | Hz | 50/60 |
| Power dissipation for each pole | | | W | 1,3 |
| Rated operating current Ie | | | | |
| AC-21A Switching resistive loads, including moderate overloads | 690V | Ie | A | 32 |
| AC-22A Switching of mixed resistive and inductive loads, including moderate overloads | 690V | Ie | A | 32 |
| Rated operating power | | | | |
| AC-23A Switching of motor loads or other highly inductive loads | | 400V | Kw (A) | 11 (22) |
| | | 690V | Kw (A) | 11 (16) |
| AC-3 Squirrel cage motors: starting, switching off motors during running | | 400V | Kw (A) | 7,5 (14) |
| | | 690V | Kw (A) | 7,5 (8) |
| Rated breaking capability in category AC-23A (cos φ=0,45) | | 400V | A | 176 |
| | | 690V | A | 128 |
| Short circuit protection | | | | |
| Rated short time withstand current (1s) | | Icw | A | 400 |
| Rated short-circuit make capacity | | Icm | A | 750 |
| Rated conditional short-circuit current | | | kA | 10 |
| With fuses class gG | | 500V | A | 32 |
| Technical data UL/CSA (sec. UL508) | | | | |
| General use voltage | | Ue | V | 600 |
| General use current | 600Vac | Ie | A | 30 |
| Rated operating power | | | | |
| 1 phase - 2 pole | | 120V | Hp/FLA | 1,5 / - |
| | | 240V | Hp/FLA | 3 / - |
| | | 200V | Hp/FLA | - / - |
| 3 phase - 3 pole | | 240V | Hp/FLA | 7,5 / 22 |
| | | 480V | Hp/FLA | 15 / 21 |
| | | 600V | Hp/FLA | 20 / 22 |
| Line protection fuses (DS size 1: Class RK5, 600Vac, 200kA A.I.C.), (DS size 2: Class J, 600Vac) | | | A | 30 |
| Short Circuit Rating@600Vac | | | kA | 5 |
| Mechanical characteristics | | | | |
| Mechanical life (120 cycles/hour) | | Operations x10 ⁶ | | 0,03 |
| Connecting capability with flexible wires | | Min-Max | mm ² | 1,5 - 10 |
| Connecting capability with solid wires | | Min-Max | mm ² | 1,5 - 16 |
| Connecting capability with flexible wires | | Min-Max | AWG | 16/08 |
| Connecting capability with solid wires | | Min-Max | AWG | 16/06 |
| Terminal screw | | | | M4 |
| Screw tightening torque | | | Nm | 1,7 |
| | | | lbf-in | 12 |
| Protection degree IEC 529 EN 60529 | | | | |
| Terminals | | | | IP20 |
| Handles | | | | IP66 |
| Ambient conditions | | | | |
| Operational ambient temperature | | | °C | -25 ÷ +55 |
| Storage ambient temperature | | | °C | -25 ÷ +55 |
| Withstand to constant humid according to IEC 60068 | | | | sec. IEC 60068-2-78 |
| Withstand to cycling humid according to IEC 60069 | | | | sec. IEC 60068-2-30 |