

Bremas type: **ES154NCNER**

### Mechanical data

Max. torque on the screws	0,8 Nm - 7 in.lb
Wire section solid and stranded	Min. 0,5 mm <sup>2</sup> – AWG 20
	Max 2,5 mm <sup>2</sup> – AWG 14
Weight	70g

### Wire strip

Length	7 mm
--------	------

### Electrical data:

Terminal protection degree	IP 20
Rated voltage IEC	300 V AC
Rated current IEC	12A
Rated voltage UL	300 V AC
Rated current UL	10 A (or 12 A at 150V)

### Thermal data

Operating temperatures	-25°C...+ 85°C
------------------------	----------------

### Conformity


RoHS compliant (Directive 2011/65/EU and Delegated Directive 2015/863)



### Approvals




### Wire locking system



### Dimensions

Measures in (mm)

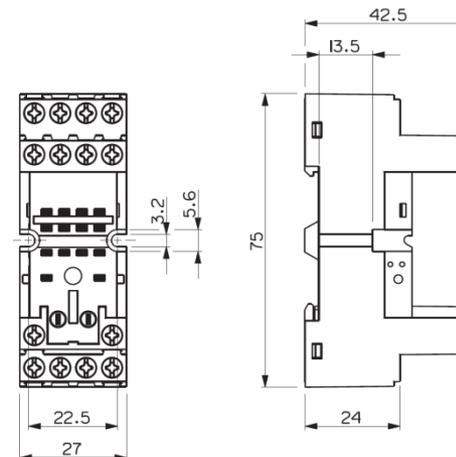

### Electrical scheme

