

Bremas type: **ES154SCNER**

Mechanical data

| | |
|---------------------------------|-----------------------------------|
| Max. torque on the screws | 0,8 Nm - 7 in.lb |
| Wire section solid and stranded | Min. 0,5 mm ² – AWG 20 |
| | Max 2,5 mm ² – AWG 14 |
| Weight | 66g |

Wire strip

| | |
|--------|------|
| Lenght | 7 mm |
|--------|------|

Electrical data:

| | |
|----------------------------|----------|
| Terminal protection degree | IP 20 |
| Rated voltage IEC | 300 V AC |
| Rated current IEC | 12 A |
| Rated voltage UL | 300 V AC |
| Rated current UL | 12 A |

Thermal data

| | |
|------------------------|-----------------|
| Operating temperatures | -25°C... + 85°C |
|------------------------|-----------------|

Conformity


RoHS compliant (Directive 2011/65/EU and Delegated Directive 2015/863)



Approvals




Wire locking system



Dimensions

Measures in (mm)

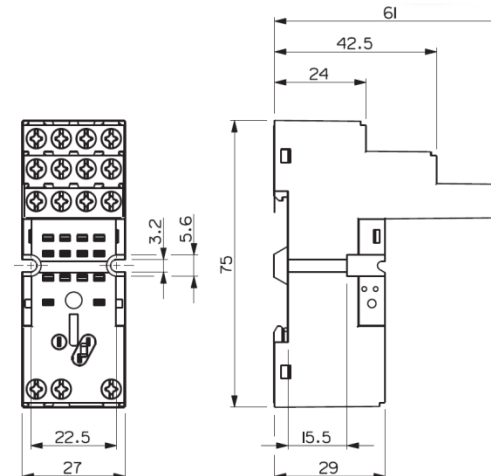

Electrical scheme

