## **Relay Sockets** ES25 Series – Datasheet


## Bremas type: ES25CNER

Mechanical data		
Max. torque on the screws	0,8 Nm – 7 in.lb	
Wire section solid and	Min. 0,5 mm <sup>2</sup> – AWG 20	
stranded	Max 2,5 mm <sup>2</sup> – AWG 14	
Weight	32,2g	
Wire strip		
Lenght	7mm	
Electrical data:		
Terminal protection degree	IP 20	
Rated voltage IEC	300 V AC	
Rated current IEC	12 A	
Rated voltage UL	300 V AC	
Rated current UL	10 A (or 12 A at 150 V AC)	
Thermal data		
Operating temperatures	-25°C… + 85°C	
Conformity		
RoHS compliant (Directive 20 2015/863)	11/65/EU and Delegated Directive	




Appro	vals		
LR	SP:	CE	

## Wire locking system



Dimensions Measures in (mm)

## Electrical scheme

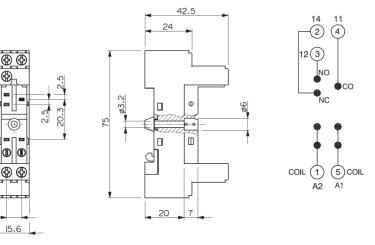

© 2016 Copyright Bremas Ersce. Subject to change without notice and errors excepted. Data reported in this paper are carefully checked and represent typical values of series production. The descriptions of the device and its applications, contexts of use, details of external controls, information on installation and operation are provided to the best of our knowledge. In any case, this does not mean that the features described may derive legal responsibilities that extend beyond the "Terms and Conditions" of Bremas Ersce. The customer / user is not absolved from the obligation to examine our information and recommendations and the relevant technical regulations before using the products for their own purposes.

7.6



