

Bremas type: **ES32CNER**

Mechanical data

Max. torque on the screws	0,8 Nm – 7 in.lb
Wire section solid and stranded	Min. 0,5 mm ² – AWG 20 Max 2,5 mm ² – AWG 14
Weight	32,2g

Wire strip

Lenght	7mm
--------	-----

Electrical data:

Terminal protection degree	IP 20
Rated voltage IEC	300 V AC
Rated current IEC	12 A
Rated voltage UL	300 V AC
Rated current UL	10 A (or 12 A at 150 V AC)

Thermal data

Operating temperatures	-25°C... + 85°C
------------------------	-----------------


Conformity

RoHS compliant (Directive 2011/65/EU and Delegated Directive 2015/863)



Dimensions


Measures in (mm)

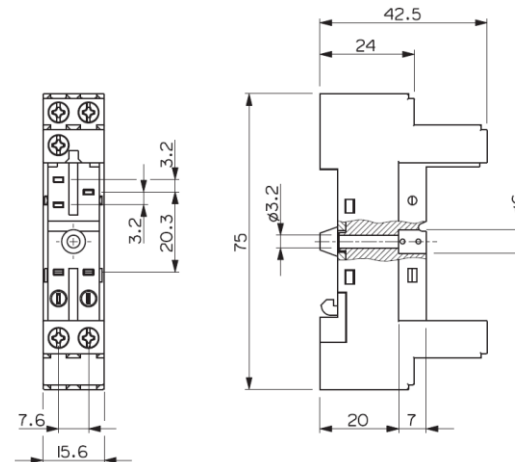

Approvals



Wire locking system



Electrical scheme

