


Bremas type: **ES503GCNER**

| Mechanical data | |
|--|-----------------------------------|
| Max. torque on the screws | 0,7 Nm - 6,2 in.lb |
| Wire section solid and stranded | Min. 0,5 mm ² – AWG 20 |
| | Max 1,5 mm ² – AWG 16 |
| Weight | 41,8g |
| Wire strip | |
| Lenght | 11 mm |
| Electrical data: | |
| Terminal protection degree | IP 20 |
| Rated voltage IEC | 300 V AC |
| Rated current IEC | 10 A |
| Rated voltage UL | 300 V AC |
| Rated current UL | 10 A (or 12 A at 150 V AC) |
| Thermal data | |
| Operating temperatures | -25°C... + 85°C |
| Conformity | |
| RoHS compliant (Directive 2011/65/EU and Delegated Directive 2015/863) | |




Dimensions
Measures in (mm)

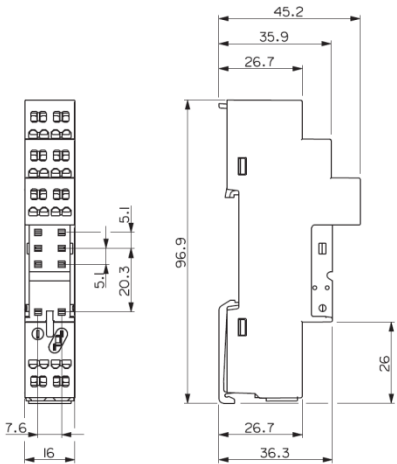

Approvals



Wire locking system



Electrical scheme

