


Bremas type: **ES8CNER**

Mechanical data	
Max. torque on the screws	0,8 Nm – 7 in.lb
Wire section solid and stranded	Min. 0,5 mm ² – AWG 20 Max 2,5 mm ² – AWG 14
Weight	44g
Wire strip	
Lenght	7mm
Electrical data:	
Terminal protection degree	IP 20
Rated voltage IEC	300 V AC
Rated current IEC	12 A
Rated voltage UL	300 V AC
Rated current UL	10 A (or 12 A at 150 V AC)
Thermal data	
Operating temperatures	-25°C... + 85°C
Conformity	
RoHS compliant (Directive 2011/65/EU and Delegated Directive 2015/863)	




Wire locking system



Dimensions

Measures in (mm)

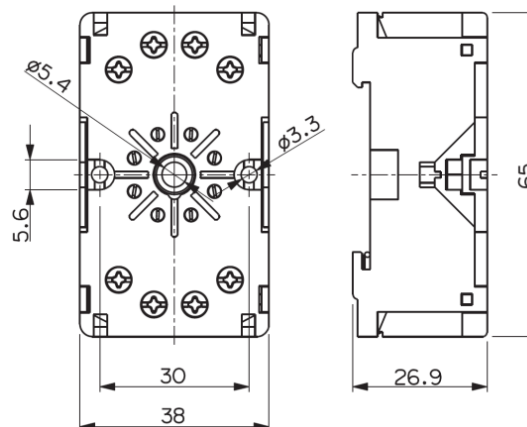

Electrical scheme

