

Cod. LAA65331

### Standard and Approvals


- Switch according to IEC/EN 60947-3
- Certified UL60947-4-1A and CAN/CSA C22.2 No. 60947-4-1-07
- Suitable as Manual Motor Controller




### Technical characteristics: Body

- 2 pole switch
- Body and button in plastic material
- IP00 Protection degree
- Command button with lock in ON Ø11,5mm
- 4 screw terminals
- Weight: 0,21kg

### Dimension

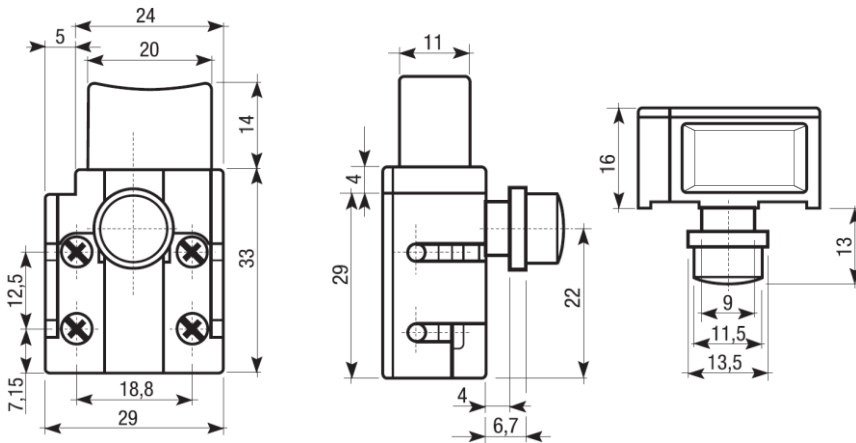

### Diagram



Rated insulation voltage	Ui	V	250
Rated operating voltage	Ue	V	250
Rated operation frequency		Hz	50/60
<b>Rated Current</b>			
Resistive load	In	A	6
Inductive load	In	A	5
<b>Mechanical characteristics</b>			
Mechanical life (120 cycles/hour)			1E5
Electrical life	Sec. EN61058		5E4
Insulation class	Sec. EN61058		II
Connecting capability with flexible wires	Min-Max	mm <sup>2</sup>	0,75-2,5
Connecting capability with solid wires	Min-Max	mm <sup>2</sup>	1-2,5
Connecting capability with flexible wires	Min-Max	AWG	19-14
Connecting capability with solid wires	Min-Max	AWG	18-14
Terminal screw			M3,5
Protection degree IEC 529 EN 60529			IP00
<b>Ambient condition</b>			
Operational ambient temperature		°C	T55
Storage ambient temperature		°C	-30 ÷ +70
Withstand to constant humid			sec. IEC 60068-2-8
Withstand to cycling humid			sec. IEC 60068-2-30