

Cod. XNF0324BK6



Standard and Approvals

- Switch according to IEC/EN 60947-3
- Certified UL60947-4-1A and CAN/CSA C22.2 No. 60947-4-1-07
- Suitable as Manual Motor Controller




Technical characteristics: Body

- Disconnect switch 4P with fuse holders
- Fuses are not included
- IP20 protection degree
- Rating operational current: 32A
- Rating thermal current: 32A
- Rating insulation voltage: 690V
- Base mounting
- Fixing:
 - with screw
 - DIN rail
- Switching angle: 90°
- Positive opening double break contacts, made of silver and alloy.


Technical characteristics: Plate and knob

- Grey plate 67x67mm and black padlockable knob (max. 3 padlocks)
- Protection degree IP66
- Fixing:
 - 2 screw at 28mm vertical
 - 2 screw at 32mm horizontal

Plate and position







Electrical scheme

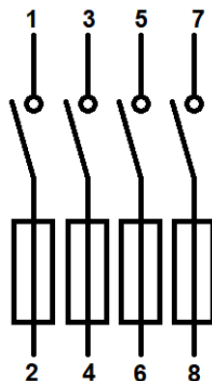

Cod. XNF0324BK6


Dimensions
measures in mm (in)

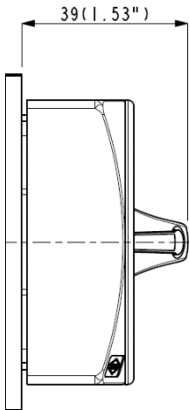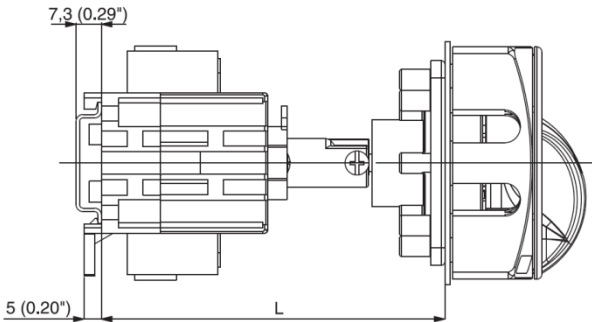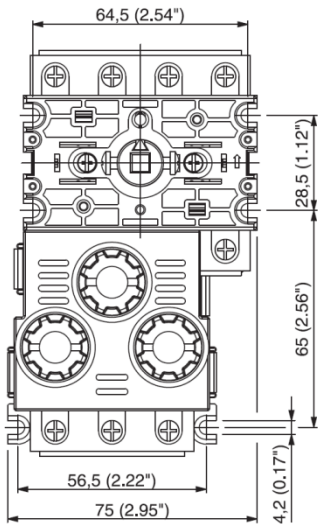

Overall length (min-max)**
for different shaft length (L1):

L1		
175*	L (mm)	99 - 243
6.89*	L (in)	3.90 - 9.57

Drilling templates
measures in mm (in)

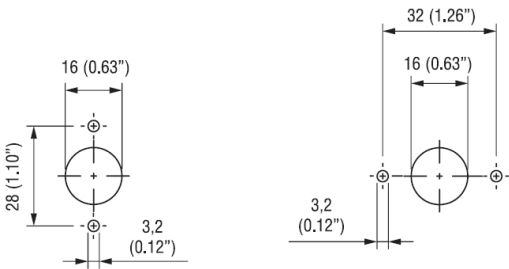

Escutcheon plate mounting options:

- 1) 2 holes with vertical distance 28mm (1.10")
- 2) 2 holes with horizontal distance 32mm (1.26")
- 3) 4 holes with distance 48 mm (1.89")

Switch mounting options:

- 1) 4 holes with distance 58x18mm (2.28x0.71")

Cod. XNF0324BK6

			XNF032	
Technical data IEC 947-3 EN 60947-3				
Rated insulation voltage	Ui	V	690	
Rated operating voltage	Ue	V	690	
Rated impulse withstand voltage	Uimp	kV	6	
Rated thermal current for open switch	Ith	A	32	
Rated thermal current for enclosed switch	Ithe	A	32	
Rated operation frequency		Hz	50	
Power dissipation for each pole		W	3,2*	
Rated operating current				
AC-21A Switching resistive loads, including moderate overloads	690V	Ie	A	32
AC-22A Switching of mixed resistive and inductive loads, including moderate overloads	690V	Ie	A	32
Rated operating power				
AC-23A Switching of motor loads or other highly inductive loads 3 phase - 3 pole	230V	Kw (A)	10 (33)	
	400V	Kw (A)	18,5 (33)	
	500V	Kw (A)	18,5 (32)	
	690V	Kw (A)	22 (23)	
AC-3 Squirrel cage motors: starting, switching off motors during running 3 phase - 3 pole	230V	Kw (A)	9 (28)	
	400V	Kw (A)	15 (27)	
	500V	Kw (A)	15 (27)	
	690V	Kw (A)	18,5 (23)	
Rated breaking capability in AC-23A (cos φ=0,45)	230V	A	256	
	400V	A	330	
Short circuit protection				
Rated short time withstand current	Icw	A	800	
Rated conditional short-circuit current		kA	10	
With fuses class gG	500V	A	32	
Mechanical characteristics				
Mechanical life (120 cycles/hour)	Mil.Man		2	
Connecting capability with flexible wires	Min-Max	mm2	1,5-10	
Connecting capability with solid wires	Min-Max	mm2	1,5-16	
Terminal screw			M4	
Screw tightening torque		Nm	1,4	
Protection degree IEC 529 EN 60529				
Terminals			IP20	
Plate and knob			IP66	
Ambient conditions				
Operating ambient temperature		°C	-25 ÷ +55	
Storage ambient temprature		°C	-30 ÷ +70	
Withstand to constant humid according to IEC 60068			sec. IEC 60068-2-78	
Withstand to cyclic humid according to IEC 60068			sec. IEC 60068-2-30	
Auxiliary contacts			XC012AB XC012CB	
Rated insulation voltage	Ui	V	690	
Rated thermal current for open switch	Ith	A	40	
AC-21A Switching resistive loads, including moderate overloads	690V	A	6	
AC-15 Control of a.c electromagnetic loads	230V	A	40	

*Power dissipated from each fuse