

**Cod. CA0260004538**

**Standard and Approvals**

- Switch according to IEC/EN 60947-3
- Certified UL60947-4-1A and CAN/CSA C22.2 No. 60947-4-1-07
- Suitable as Manual Motor Controller
- CCC certified



**Technical characteristics: Body**

- ON-OFF switch 2 poles
- IP00 Protection degree
- Rated operational current Ie: 25A
- Rated thermal current Ith: 32A
- Rated insulation voltage Ui: 690V
- Rear Mounting
- Fixing with 4 screw at 36x36mm
- Switching angle: 60°
- Class V2 self-extinguishing thermoplastic housing
- Assembled with metal shaft and threaded stud bolts to ensure maximum operating reliability
- Positive opening double break contacts, made of silver and alloy




(purely indicative picture)



**Technical characteristics: Plate and knob**

- Yellow 48x48mm and red lockable knob
- IP66 Protection degree
- Fixing with 4 screw at 36x36mm


**Positions**



**Electrical scheme**

	<b>0</b>					
	<b>1</b>	X	X	X	X	
Contatto		1	3	5	7	8
Elemento		<b>1</b>		<b>2</b>		




**Electrical function**



**Cod. CA0260004538**

measures in mm (in)

**Dimensions**

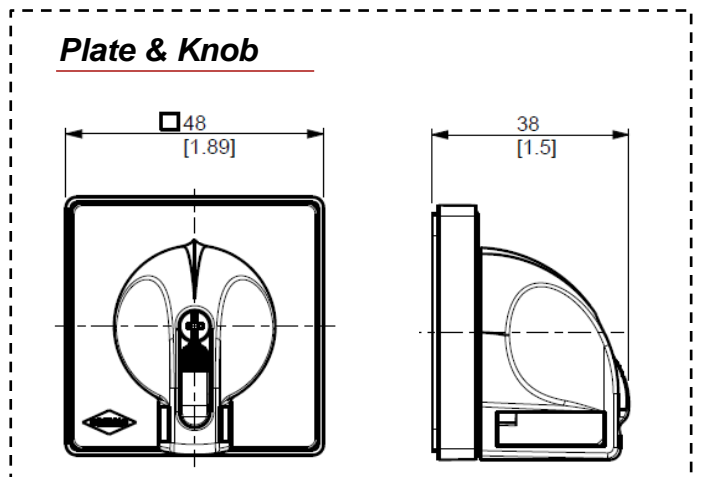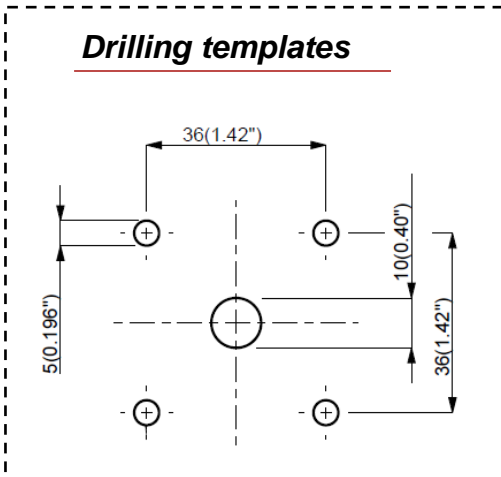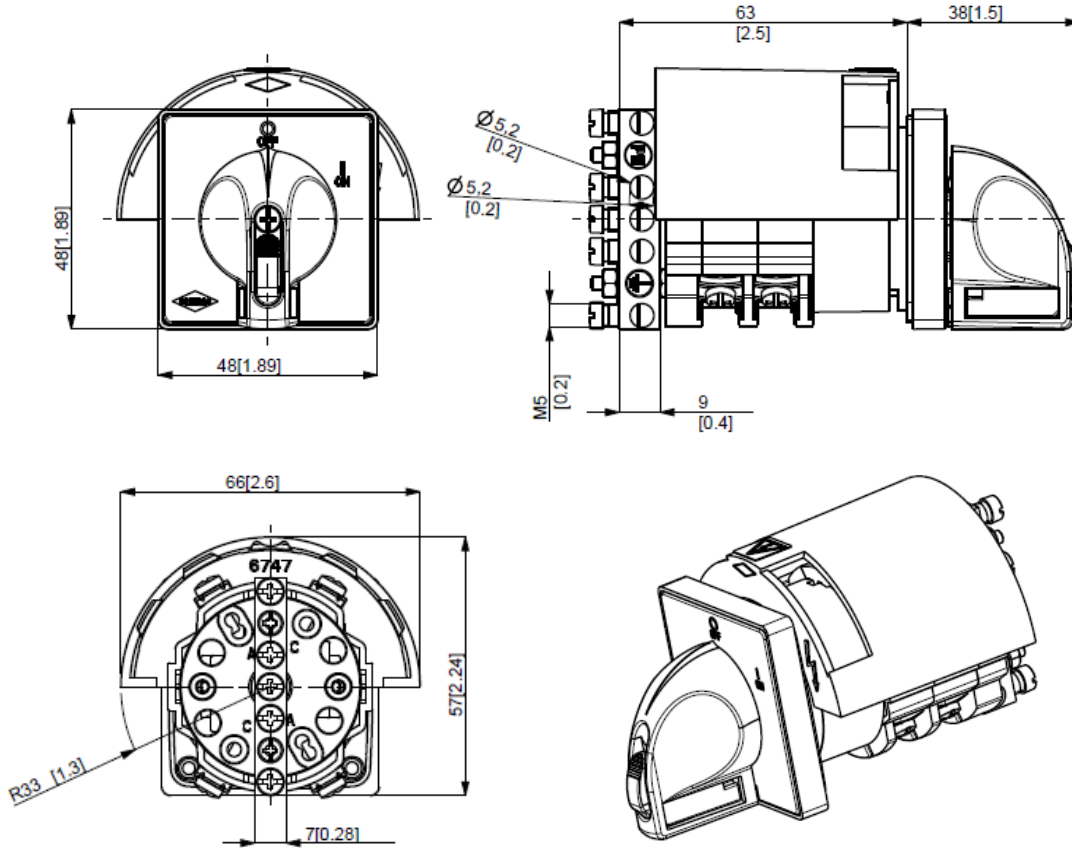

### Cod. CA0260004538

<b>Technical data IEC 947-3 EN 60947-3</b>				
Rated insulation voltage	Ui	V	690	
Rated operating voltage	Ue	V	690	
Rated impulse withstand voltage	Uimp	kV	6	
Rated thermal current for open switch	Ith	A	32	
Rated thermal current for enclosed switch	Ithe	A	25	
Rated operation frequency		Hz	50/60	
Power dissipation for each pole		W	0,5	
<b>Rated operating current</b>				
AC-21A Switching resistive loads, including moderate overloads	Ie	A	25	
AC-22A Switching of mixed resistive and inductive loads, including moderate overloads	Ie	A	20	
AC-20A Connecting and disconnecting under no loads conditions			-	
<b>Rated operating power</b>				
AC-23A Switching of motor loads or other highly inductive loads 3 phase - 3 pole	230V	Kw (A)	7,5 (24)	
	400V	Kw (A)	11 (20)	
	500V	Kw (A)	11 (15)	
	690V	Kw (A)	11 (11)	
AC-23A Switching of motor loads or other highly inductive loads 1 phase - 2 pole	110V	Kw (A)	2,2 (25)	
	230V	Kw (A)	3,7 (20)	
AC-3 Squirrel cage motors: starting, switching off motors during running 3 phase - 3 pole	230V	Kw (A)	4,5 (16)	
	400V	Kw (A)	8 (16)	
	500V	Kw (A)	8 (12,5)	
	690V	Kw (A)	8,5 (10)	
AC-3 Squirrel cage motors: starting, switching off motors during running 1 phase - 2 pole	110V	Kw (A)	1,5 (17)	
	230V	Kw (A)	3 (17)	
	400V	Kw (A)	-	
AC-4 Squirrel cage motors: starting, pluggin, inching	230V	Kw (A)	1,7	
	400V	Kw (A)	2	
AC-15 Control of a.c electromagnetic loads	230V	A	8	
	400V	A	6	
Rated breaking capability in AC-23A (cos φ=0,45)	230V	A	192	
	400V	A	160	
<b>Short circuit protection</b>				
Rated short time withstand current	Icw	A	240	
Rated short-circuit make capacity	Icm	A	1500	
Rated conditional short-circuit current	-	kA	5	
With fuses class gG	500V	A	25	
<b>Technical data UL/CSA</b>				
Rated operating voltage	Ue	UL/CSA V	600/-	
General use current	Ie	UL/CSA A	25/-	
Short circuit rating @600Vac		Arms	5000	
Fuse size (Class RK5, 600Vac, 200kA A.I.C.)		A	25	
<b>Rated operating power</b>				
1 phase - 2 pole	120V	Hp (A)	2 (24)/-	
	240V	Hp (A)	3 (17)/-	
3 phase - 3 pole	200V	Hp (A)	5 (17,5)/-	
	240V	Hp (A)	7,5 (22)-	
	480V	Hp (A)	10 (14)	
	600V	Hp (A)	10 (11)	
<b>Mechanical characteristics</b>				
Panel tickness	Max	mm	4	
Mechanical life		Cycles x 10 <sup>6</sup>	1,5	
		Cycles/hr	120	
<b>Connection according to IEC 9471-1 and EN 50947-1</b>				
Connecting capability	With flexible wires	Min-Max	mm <sup>2</sup>	2x1,5-4
		Min-Max	AWG	16-10
	With solid wires	Min-Max	mm <sup>2</sup>	2x1,5-6
Connection terminal screw dimensions		Type	M3,5	
Screw tightening torque		Nm	1	
<b>Protection degree IEC 529 EN 60529</b>				
Terminals		IP	00	
<b>Ambient conditions</b>				
Operating ambient temperature		°C	-25 ÷ +55	
Storage ambient temprature		°C	-30 ÷ +70	
Withstand to constant humid according to IEC 60068			2-78	
Withstand to cyclic humid according to IEC 60068			2-30	